

AERODROME CHART - ICAO


ARP 513019N 0000319E

AD ELEV 19FT


LONDON CITY EGLC

AERO INFO DATE 28 APR 09

GUND (Geoid Undulation) = The height of the Geoid (MSL) above the Reference Ellipsoid (WGS 84) at the stated position.	
BEARINGS ARE MAGNETIC ELEVATIONS AND HEIGHTS ARE IN FEET	
ELEVATIONS IN FEET AMSL	308 (289)
HEIGHTS IN FEET ABOVE AD	



RUNWAY/TAXIWAY/APRON PHYSICAL CHARACTERISTICS			
APRON / RWY / TWY	SURFACE	BEARING STRENGTH	ELEVATION
RWY 09/27	Grooved Concrete	30/R/C/Y/T	-
Main Apron	Conctere	30/R/C/Y/T	17ft amsl
Main Taxiway	Concrete	30/R/C/Y/T	-

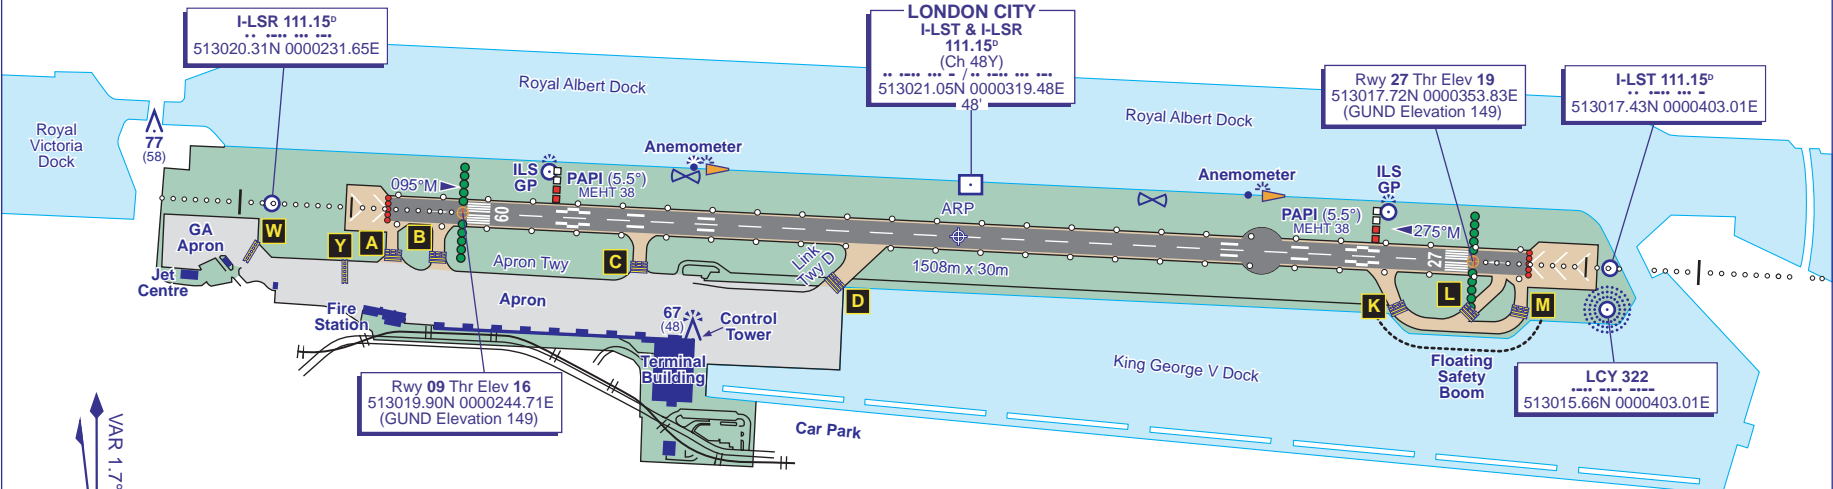

VAR 1.7°W - 2009
N
Annual Rate of Change 0.14°E

308
(289)

COM		
ATIS	136.350	CITY INFORMATION
TWR	118.075	CITY TOWER
	121.825 (GMC)	CITY GROUND
	118.400	(as directed by ATC)
	121.600	CITY FIRE
LIGHTING		
APCH 27	462m HI C/L with 2 bars.	
APCH 09	401m HI C/L with 2 bars.	
THR 27	Flush HI green with HI green W bars.	
THR 09	Elev HI green with HI green W bars.	
RWY 09	HI bi-d edge. Yellow edge for final 450m. (First 99m red). End lights red.	
RWY 27	HI bi-d edge. Yellow edge for final 450m. (First 74m red). End lights red. Blue edge on turning area.	
TWY	Green C/L, blue edge on curves. Red stop bars with yellow RWY guard lights at holds.	

CHANGE: RWY 10/28 REDESIGNATED 09/27.